



Access Report

Tenambit Community Centre
Tyrrell Street
TENAMBIT NSW 2322

For: Maitland City Council
Ref: PAA_23180_Tenambit



Document Control

This report has been prepared based on the documentation available and time allocated to conduct the review. All reasonable attempts have been made to identify key compliance matters.

Revision Summary:

prepared by:			
Lindsay Perry	Draft	Issued for review	19 October 2023
	Revision 1	Issued for further review	4 November 2023
	Revision 2	Issued for DA	8 November 2023
	Revision 3	Updated for DA	28 November 2023
Jane Bryce	Revision 4	Updated for DA	10 May 2024

Contact Details:

Lindsay Perry Access Pty Ltd t/a **purple apple access**
PO Box 453 NEW LAMBTON NSW 2305

Lindsay Perry

lindsay@purpleapple.com.au
0418 909 180

Jane Bryce

jane@purpleapple.com.au
0411 619 966

Lee-May Whong

lee@purpleapple.com.au
0457 784 328

Copyright:

This content of this report, including any intellectual property, remains the property of Lindsay Perry Access Pty Ltd and cannot be reproduced without permission.

Clarifications:

This report is limited to items within drawings listed in this report only.

Construction is to be in accordance with the recommendations made in this access report to ensure compliance.

Any dimensions quoted throughout this report and within Australian Standards are CLEAR dimensions, not structural. This needs to be considered during construction to account for wall linings and the like.

Definitions:

The following terminology has been used throughout this report:

Compliant | compliance with current accessibility legislation has been achieved

Compliant Configuration | circulation and spatial planning requirements are compliant

Capable of compliance | compliance is achievable through detailed design

Not Yet Compliant | circulation and spatial planning requirements have not yet been met

To be addressed during detailed design | details not available or applicable at DA stage

To be confirmed | inadequate information is provided to determine compliance



Executive Summary

Development application documentation for the Tenambit Community Centre located at Tyrrell Street Tenambit, has been reviewed against current accessibility legislation.

The following table summarises our findings.

Item No.	Description	Compliance Status
The Disability (Access to Premises) Standards		
5.1	Access Code	Refer BCA commentary
5.2	New Work & The Affected Part	Not applicable
Access and Approach		
6.1	Allotment Boundary to Entrance	Compliant
6.2	Accessible Carparking to Entrance	Compliant
6.3	Accessways (Pathways Generally)	Capable of compliance
6.4	Accessible Carparking	Compliant configuration
6.5	Walkways	Capable of compliance
6.6	Accessible Ramp	Capable of compliance
6.7	Stairs	Capable of compliance
6.8	Threshold Ramps	Compliant configuration
6.9	Accessible Entrance	Compliant configuration
Interior		
7.1	Extent of Access Generally	Compliant
7.2	Circulation Areas	Compliant
7.3	Doorways	Compliant configuration
7.4	Hearing Augmentation	To be addressed during detailed design
7.5	Exempt Areas	None specified
7.6	Floor Finishes	To be addressed during detailed design
7.7	Carpet	To be addressed during detailed design
7.8	Controls	To be addressed during detailed design
7.9	Visual Indication to Glazing	To be addressed during detailed design
7.10	Tactile Indicators	To be addressed during detailed design
7.11	Signage	To be addressed during detailed design
Sanitary Facilities		
8.1	Distribution	Compliant
8.2	Accessible Toilets	Capable of compliance
8.3	Ambulant Toilet Cubicles	Capable of compliance

We consider that the drawings presented for assessment, for the purposes of a development application, generally comply with current statutory requirements.

Accessibility requirements are included in Appendix 1 of this report to guide the detailed design. Best Practice options are provided within Appendix 2 and we encourage their implementation into the design.



The recommendations throughout this report reflect the professional opinion and interpretation of Lindsay Perry Access Pty Ltd. This may differ from that of other consultants.

LINDSAY PERRY

Access Consultant (ACAA Accreditation No. 136)
Internationally Certified Access Consultant ICAC BE-02-106-18
Registered Architect NSW 7021
Livable Housing Assessor 20047 | LHA NCC Assessor 20047
NDIS SDA Assessor SDA00049



JANE BRYCE

Access Consultant (ACAA Accreditation No. 200)
Livable Housing Assessor 20286
NDIS SDA Assessor SDA00041
Changing Places Assessor CP008



1 Project Background

The Tenambit Community Centre is designed over a single level and provided two (2) pavilions with a central landscaped courtyard. Facilities include multipurpose rooms, meeting room and tenancy with associated sanitary facilities.



Figure 1 | Proposed Development

2 Reviewed Documentation

Documentation prepared by AJC has been reviewed as follows:

dwg no.	drawing name	revision
TE_DA0001	Cover Sheet	4
TE_DA1001	Proposed Site Plan	4
TE_DA1002	Site Analysis / Existing Site Plan	4
TE_DA1003	Proposed Streetscape Elevations	4
TE_DA1101	DA Cut & Fill Diagram	4
TE_DA2101	Proposed Ground Floor Plan	4
TE_DA2102	Proposed Roof Plan	4
TE_DA3101	Elevations – East Pavilion	4
TE_DA3102	Elevations – West Pavilion	4
TE_DA3201	Sections	4
TE_DA3901	Perspectives	3
SK033	Landscape Ramp Setout	1

3 Council DCP Requirements for Accessibility

Maitland City Council DCP (2011) Part 3 Design Guidelines contains requirements for accessibility. The overall principles are as follows:

- a) To ensure all new developments are constructed to accommodate the needs of those people who may use the services that the proposed land use may provide.
- b) To ensure people with a disability enjoy the same level of access, both in gaining entry to and moving within, those buildings which meet a high public demand.
- c) To ensure those land uses which provide a service which is likely



to attract a larger proportion of people with a disability, adequately provide for the needs of these people.

- c) That the provisions of continuous access path of travel to and within a building is the primary principle.
- d) The secondary principle is the provision of car parking and other amenities.
- e) To ensure that all existing commercial buildings in Maitland are upgraded to meet the primary principle of the Plan, over time.

Part C.2 of the DCP is specific to childcare centres. With regard to access for people with disabilities, the following is required:

- l) Access and facilities for the disabled are to be provided in accordance with the Australian Standard AS 1428 Part 1 and Chapter C.1: Accessible Living in this DCP.
- m) One of the allotted vehicle parking spaces shall be provided for disabled parking / service vehicles close to the main entrance of the childcare centre.

The requirements of the DCP have been addressed in the design of the building as demonstrated throughout this report.

4 Legislation

Access assessment has been made against Access Legislation including:

- The Commonwealth Disability Discrimination Act 1992 (DDA)
- Disability (Access to Premises (Buildings)) Standards 2010
- Access Code for Buildings 2010
- The National Construction Code Building Code of Australia Volume 1 2022 (BCA)
 - Part D3 D15 Landings (Slip Resistance)
 - Part D3 D22 Handrails
 - Part D4 – Access for People with Disabilities
 - Section F2D5 – Accessible Sanitary Facilities
- Australian Standard AS1428.1 (2009) Amendment 1 & 2, – Design for Access and Mobility
- Australian Standard AS1428.2 (1992) – Design for Access and Mobility: Enhanced and additional requirements – Buildings and facilities
- Australian Standard AS1428.4.1 (2009) Amendment 1 – Design for Access and Mobility: Means to assist the orientation of people with vision impairment – Tactile ground surface indicators
- Australian Standard AS2890.6 (2009) – Parking Facilities – Off street carparking For People with Disabilities.

A summary of the requirements of relevant legislation follows.



The Disability Discrimination Act 1992

The DDA requires independent, equitable, dignified access to all parts of the building for all building users regardless of disability. The DDA makes it unlawful to discriminate against a person on the grounds of disability.

The Disability (Access to Premises) Standards

Any application for a building approval for a new building or upgrade of an existing building triggers the application of the Premises Standards.

The Premises Standards include an **Access Code** written in the same style as the Building Code of Australia. It has a number of Performance Requirements that are expressed in broad terms and references a number of technical Deemed-to-Satisfy Provisions.

The National Construction Code / Building Code of Australia (Volume 1)

The Building Code of Australia (BCA) is contained within the National Construction Code (NCC) and provides the minimum necessary requirements for safety, health, amenity and sustainability in the design and construction of new buildings (and new building work in existing buildings) throughout Australia. The BCA is a performance-based code and compliance can be met through satisfying the deemed-to-satisfy provisions or by meeting the prescribed performance requirements.

For a Class 9b building BCA requires access for people with disabilities to and within all areas usually used by the occupants.

AS1428 – Design for Access and Mobility

The AS1428 Suite provides design requirements for accessibility generally, covering all types of disabilities. AS1428.1 and AS1428.4.1 are referenced by the NCC / BCA.

- Australian Standard AS1428.1 (2009) Amendment 1 & 2, – Design for Access and Mobility contains access requirements that are mandatory for the provision of access for persons with a disability
- Australian Standard AS1428.2(1992) – Design for Access and Mobility: Enhanced and additional requirements – Buildings and facilities provides enhanced and best practice requirements that will minimize DDA risk
- Australian Standard AS1428.4.1 (2009) Amendment 1 – Design for Access and Mobility: Means to assist the orientation of people with vision impairment – Tactile ground surface indicators

AS2890.6 – Off-street Carparking for People with Disabilities

AS2890.6 (2009) applies to the carparking areas generally.



5 The Disability (Access to Premises) Standards

Any application for a building approval for a new building or upgrade of an existing building triggers the application of the Premises Standards.

The Premises Standards include an Access Code written in the same style as the Building Code of Australia. Additionally, it offers a number of concessions for existing buildings as outlined below.

5.1 Access Code

The Premises Standards include an Access Code written in the same style as the Building Code of Australia.

Compliance Summary:

Refer to BCA requirements throughout subsequent sections of this report.

While the introduction of NCC 2022 causes clause numbers to differ between documents, the intent of each code remains similar.

5.2 New Part and Affected Part (Existing Buildings)

The Disability (Access to Premises – Buildings) Standards apply to **...a new part, and any affected part, of a building**, to the extent that the part of the building is...a Class 3, 5, 6, 7, 8, 9 or 10 building (Clause 2.1).

New part is defined as follows (Clause 2.1 (4)):

- An extension to the building or a modified part of the building.

An **affected part** is defined as follows (Clause 2.1 (5)):

- The principal pedestrian entrance of an existing building that contains a new part; and
- Any part of an existing building, that contains a new part, that is necessary to provide a continuous accessible path of travel from the entrance to the new part.

Compliance Summary:

Not applicable

Commentary:

New work and affected part provisions (Part 2.1(4 & 5)) are applicable to modification works only, not new developments.

6 BCA | Access and Approach + External Areas Generally

The approach to the building needs to be addressed when considering access for persons with a disability. The BCA has three requirements for the approach to the building for persons with a disability.

An accessible path of travel is required to the building entrance from the allotment boundary at the main points of pedestrian entry, from accessible carparking areas and from any adjacent and associated accessible building.

In this instance, the approach to the building has been considered as follows:

- from the allotment boundary at the pedestrian entrance along Kenneth & Tyrrell Street to the building entrance;
- from the accessible carparking area to the building entrance.

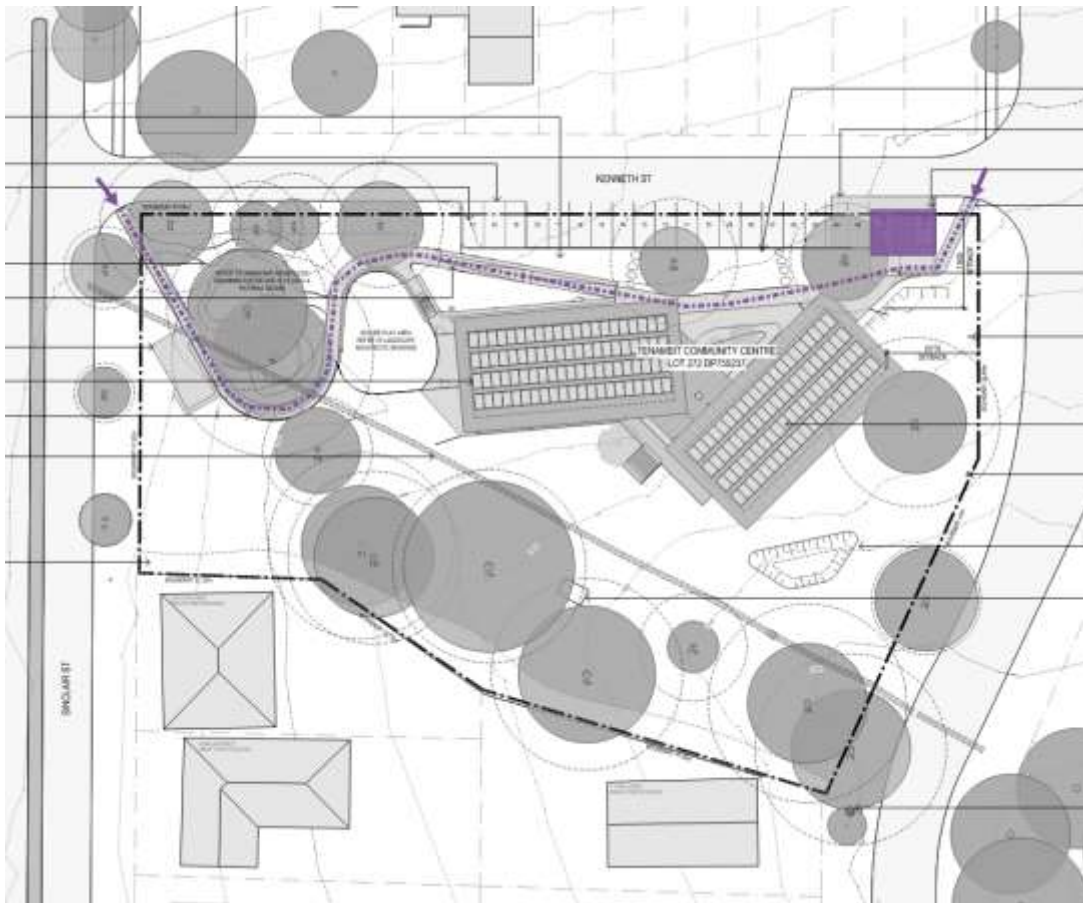


Figure 2 | Overall Site Plan

6.1 Approach from Allotment Boundary

The BCA requires that a continuous accessible path of travel be provided from the allotment boundary at the main points of pedestrian entry to the main entrance.

Compliance Summary:

Compliant



Commentary:

An accessible path of travel is provided to the building entrance from the allotment boundary along Kenneth Street and Tyrell Street via formed footpaths. The existing condition indicates that on-grade access is achievable.

6.2 Approach from Accessible Carparking

The BCA requires that a continuous accessible path of travel be provided from the accessible carparking areas to the main entrance.

Compliance Summary:

Compliant

Commentary:

An accessible path of travel is provided to the building entrance via a formed footpath. Site levels indicate that on-grade access is achievable.

6.3 Accessways (Pedestrian Areas Generally)

The accessible path of travel refers to a pathway which is grade restricted and provides wheelchair access as per the requirements of AS1428.

Compliance Summary:

Capable of compliance

Commentary:

Footpaths that form the approach to the building are generally 1500mm wide. Site levels indicate an accessible path of travel.

6.4 Accessible Carparking

There is a requirement for the provision of accessible carparking within this development. For a community centre, (Class 9b) BCA requires one (1) accessible space for every fifty (50) carparking spaces or part thereof.

Compliance Summary:

Compliant configuration

Commentary:

On grade parking is provided on the northern side of the building. Plans note a total of twenty-one (21) carparking spaces, two (2) of which area nominated as accessible spaces.

The overall configuration of the accessible carparking achieves compliance with current legislation including dimensions of the space and associated shared areas, chevron markings and provision of a bollard, noting that the shared area is located at the rear of the spaces, not roadside.



6.5 Walkways

AS1428.1 defines a walkway as having a gradient between 1:33 and 1:20. The accessible path of travel refers to a pathway which is grade restricted and provides wheelchair access as per the requirements of AS1428.

Compliance Summary:

Capable of compliance

Commentary:

A walkway is nominated on the southern side of the western pavilion. It has a nominated gradient of 1:21 and length less than 15m. It is enclosed along one side.

6.6 Accessible Ramps

AS1428.1 defines a ramp as having a gradient between 1:14 and 1:20. The accessible path of travel refers to a pathway which is grade restricted and provides wheelchair access as per the requirements of AS1428.

Compliance Summary:

Capable of compliance

Commentary:

A ramp system provides part of the approach to the building from the western side of the site. The ramp is designed in three sections. The configuration of the ramp is in keeping with accessibility requirements including length between landings, circulation areas at landings and the provision of handrails with extension to both sides. The curved section of the ramp is to have a clear width of 1500mm.

Ensure tactile indicators are provided at the top and bottom of the ramp and that kerbrails are provided as necessary where ramp is not enclosed.

6.7 Stairs

AS1428.1 has access requirements for all public access stairs and is applicable in this instance.

Compliance Summary:

Capable of compliance

Commentary:

Stairs are provided as a part of the pedestrian access from the community centre to the adjoining recreational areas to the south of the building.

The overall configuration of the stairs achieves compliance with current legislation including handrails with extensions both sides



and tactile indicators top and bottom. Handrail extensions do not protrude into the traversing path of travel.

Ensure provision of contrasting non-slip nosings to treads.



6.8 Threshold Ramps

To mitigate water ingress, it is sometimes necessary to construct a threshold ramp at building entrances.

Compliance Summary:

Compliant configuration

Commentary:

Threshold ramps are provided to external doorway generally. The overall configuration of the threshold ramps is in keeping with accessibility requirements.

6.9 Accessible Entrances

In a building required to be accessible, an accessway must be provided through the principal pedestrian entrance, and not less than 50% of all pedestrian entrances including the principal pedestrian entrance.

Compliance Summary:

Compliant configuration

Commentary:

Single and double hinged doorways provide entry to the building and offer compliant circulation areas. Ensure that the selected door enables a clear opening width of 850mm. For double doors, ensure a clear opening width of 850mm for single leaf operation.

7 BCA | Interior

The building is designed over a single level and provides two pavilions. The western pavilion accommodates a multipurpose room, tenant and associated sanitary facilities. The eastern pavilion accommodates a multipurpose room, meeting room and associated facilities.

7.1 Extent of Access Generally – BCA

For a community centre (Class 9b) access for people with disabilities is required to and within all areas normally used by the occupants.

Compliance Summary:

Compliant

7.2 Circulation Areas

BCA (Clause D4D4) requires the provision of turning spaces and passing areas to corridors to enable wheelchair circulation throughout a building.

Turning spaces 1540mm wide by 2070mm long are required within 2m of the end of corridors to enable a wheelchair to turn through 90° and passing areas 1800mm wide by 2000mm long are required every 20m along a corridor unless there is a clear line of sight.



Within corridor areas, 1500x1500mm is required to facilitate a 90° turn by a wheelchair. This must be accommodated within accessible areas.

Compliance Summary:

Compliant

7.3 Doorways Generally

AS1428.1 has requirements for doorways within the accessible path of travel to enable independent access for people using a wheelchair.

Compliance Summary:

Compliant Configuration

Commentary:

Doorways within the accessible path of travel are generally provided with adequate circulation areas for compliance.

7.4 Hearing Augmentation

For buildings that are required to be accessible, the BCA (Clause D4D8) requires hearing augmentation systems within auditoriums, meeting rooms and the like **where an inbuilt amplification system, other than the one used for emergency warning is installed**. The following systems can be used:

Compliance Summary:

To be addressed during detailed design.

7.5 Exempt Areas

BCA Clause D4D5 does not require access for people with disabilities to areas that would be inappropriate due to the particular use of the area or would pose a health and safety risk. This includes the path of travel to these areas.

Compliance Summary:

None specified

Commentary:

Within this development, the following areas are considered to be exempt from requiring access for people with disabilities: plant and service areas, bin areas, storerooms, cleaner.

7.6 Floor Finishes

All floor finishes are to be flush to provide an accessible path of travel throughout the different areas of the building. Maximum allowable construction tolerance is 3mm (5mm for beveled edges) as part of the accessible path of travel.

Compliance Summary:

To be addressed during detailed design stages



7.7 Carpet

BCA requires a maximum carpet pile height of 11mm and carpet backing thickness not exceeding 4 mm.

Compliance Summary:

To be addressed during detailed design stage.

7.8 Controls

Controls such as light switches, GPOs, alarm keypads, card swipes, etc are to be located within the accessible height range of 900-1100mm above the floor level and not within 500mm of an internal corner to comply with AS1428.1(2009), Clause 14.

Compliance Summary:

To be addressed during detailed design stage.

7.9 Visual Indication to Glazing

Provide decals to all full height glazing that can be mistaken for a doorway to assist persons with a vision impairment. Decals to be solid and have a minimum 30% luminance contrast to the background colour and be not less than 75mm high located within the height range of 900-1100mm above the finished floor level per AS1428.1, Clause 6.6.

Compliance Summary:

To be addressed during detailed design stage.

7.10 Tactile Indicators

For a building that is required to be accessible, tactile ground surface indicators must be provided to warn people who are blind or have a vision impairment that they are approaching a hazard (BCA D4D9).

Tactile indicators to be detectable, durable, non-slip and have a minimum 30% luminance contrast to the background color (45% for discrete tactile indicators and 60% for discrete two-tone tactile indicators).

Compliance Summary:

To be addressed during detailed design stage.

7.11 Signage

Signage to identify sanitary facilities, hearing augmentation and required exits are to be provided in accordance with BCA Clause D4D7. This includes provision of the International Symbol for Access or International Symbol for Deafness as appropriate. Signage to comply with AS1428.1 (2009), Clause 8.

Compliance Summary:

To be addressed during detailed design stage.



8 BCA | Sanitary Facilities

The BCA / Access Code for Buildings (Clause F4D5) require the provision of sanitary facilities catering for people with disabilities.

8.1 Distribution of Accessible Sanitary Facilities

Accessible sanitary facilities are required as follows – these are general requirements and not project specific.

- A unisex accessible toilet at each level that provides sanitary facilities. Where more than one bank of toilets is provided at any level, at least 50% of those banks will have an accessible toilet facility.
- At each bank of toilets where there is one or more toilets in addition to a unisex accessible sanitary compartment at the bank of toilets, a sanitary compartment suitable for a person with an ambulant disability must be provided for use by males and females.
- A unisex accessible shower is required where showers are required by F4D7. (not required within this development).
- A unisex accessible adult change facility must be provided in some public buildings (not required within this development).

Compliance Summary:

Compliant

Commentary:

There are five (5) unisex accessible sanitary facilities provided within the development – one (1) within each multipurpose room, one (1) within the tenancy, a twenty-four-hour facility and a common-use facility. Both left and right handed facilities are provided.

An ambulant toilet is provided within the common use facilities in adjacent to the male and female toilet.

8.2 Unisex Accessible Sanitary Compartment

Unisex accessible sanitary compartments are provided within this development.

Compliance Summary:

Capable of compliance

Commentary:

Overall room dimensions and the set-out of fixtures is conducive to compliance with current accessibility legislation.



8.3 Cubicles for People with an Ambulant Disability

Ambulant toilets are provided within this development.

Compliance Summary:

Capable of compliance

Commentary:

Overall cubicle dimensions and circulation areas are conducive to compliance with current accessibility legislation. Gender specific ambulant cubicles can be addressed at the time of detailed design.

9 Conclusion

This report demonstrates that the fundamental aims of accessibility legislation are achievable within the proposed development. Spatial planning and general arrangements of facilities will offer inclusion for all building users.

Disability is often defined as any limitation, restriction or impairment which restricts everyday activities and has lasted or is likely to last for at least 6 months. Disabilities can be very varied. They can be physical, cognitive, intellectual, mental, sensory, or developmental. They can be present at birth or can occur during a person's lifetime. They can also be permanent or temporary. In Australia, almost one in five people – 4.3 million – have a disability with one in three having severe or profound core activity limitation.

Equity and dignity are important aspects in the provision of access to buildings for all users. With respect to people with a disability, equity and dignity are sometimes overlooked in the construction of new buildings or refurbishment works. The design approach needs to maintain a high level of equity for people with disabilities and meet the performance requirements of the BCA. The performance requirements adopt two main concepts in the provision of access for people with a disability being **to the degree necessary** and **safe movement**. Both of these concepts need to be achieved within the context of equitable and dignified access.

In this respect, a wide range of disabilities needs consideration and a compromise reached between requirements of different disability groups. Measures need to be implemented to ensure inclusion of all users, not a particular disability group in isolation.

We consider that the drawings presented for assessment, for the purposes of a development application, demonstrate that compliance with current statutory requirements affecting accessibility is achievable subject to detailed design at the construction certificate stage (refer to Appendix 1 for requirements).



Appendix 1 | Accessibility Requirements



The following accessibility requirements are to be incorporated into the detailed design to ensure compliance of the built form.

Accessways Generally

The accessible path of travel refers to a pathway which is grade restricted and provides wheelchair access as per the requirements of AS1428 as follows:

- a. The minimum unobstructed width of all pathways is to be 1000mm (AS1428.1, Clause 6.3). A width of 1200mm is preferred for compliance with AS1428.2.
- b. All pathways are to be constructed with no lip or step at joints between abutting surfaces (a construction tolerance of 3mm is allowable, or 5mm for bevelling edges).
- c. The maximum allowable crossfall of pathways is to be 1:40.
- d. The ground abutting the sides of the pathways should follow the grade of the pathway and extend horizontally for 600mm. We note that this is not required where there is a kerb or handrail provided to the side of the pathway.
- e. Pathways to have passing bays complying with AS1428.1 at maximum 20m intervals where a direct line of site is not available. They are required within 2m of the end of the pathway where it is not possible to continue travelling along the pathway. A passing space shall have a minimum width of 1800 for a minimum length of 2000mm. Refer to AS1428.1, Clause 6.4.
- f. Grated drains within the accessible path of travel are to have circular openings no greater than 13mm in diameter and slotted openings not greater than 13mm wide – elongated openings must traverse the direction of travel.

Walkways

AS 1428.1 has access requirements for walkways as follows:

- a. The minimum unobstructed width of walkways is to be 1000mm (AS1428.1, Clause 6.3). A width of 1200mm is preferred for compliance with AS1428.2.
- b. Walkways are to be constructed with no lip or step at joints between abutting surfaces (a construction tolerance of 3mm is allowable, 5mm for bevelled edges -refer to Figure 6 of AS1428.1).
- c. The maximum allowable crossfall of a walkway is to be 1:40.
- d. Surface of the walkway to be slip-resistant.



- e. The ground abutting the sides of the walkway should follow the grade of the pathway and extend horizontally for 600mm. This is not required where there is a kerb or handrail provided (refer to AS1428.1 Clause 10.2).
- f. Maximum allowable gradient of the walkway is 1:20 and maximum length between landings to be 15m (for 1:20 gradient). Landings to be a minimum 1200mm in length (where there is no change in direction). For changes in direction of 180°, landings to be 1540mm in length – refer to AS1428.1(2009), Clause 10.8.

Stairs – External

AS 1428.1 has access requirements for all public access stairs as follows:

- a. Stairs to comply with AS1428.1(2009), Clause 11.2.
- b. Stairs to have closed or opaque risers. Open risers cause confusion for persons with a vision impairment and may trigger conditions such as epilepsy due to light penetrating through the open riser.
- c. Provide handrails, with extensions, to both sides of the stair (AS1428.1 (2009), Clause 11.2 & 12). Handrails to have an external diameter between 30-50mm to assist persons with a manual disability such as arthritis.
- d. Stair nosings to have minimum 30% luminance contrast strip 50-75mm wide to the top of the stair tread to assist persons with a vision impairment. The strip can be set back 15mm from the edge of the riser.
- e. Stair nosings shall not project beyond the face of the riser.
- f. Provide tactile indicators at the top and bottom of the stair to comply with BCA Clause D4D9 and AS1428.4.

Handrails are required on both sides of the stair to cater for left and right-handed disabilities. A central handrail is also an acceptable solution where adequate width is available. In this instance, the use of a double handrail is encouraged so that two users can travel in opposite directions and maintain their grip on the handrail.

Tactile indicators to be detectable, durable, non-slip and have a minimum 30% luminance contrast to the background colour.

Tactile indicators at the top and bottom of the stair to be 600-800mm deep across the width of the stair set back 300mm from the edge of the stair.

Accessible Carparking

Access requirements for the accessible carparking are as follows and should be addressed during preparation of the construction certificate documentation.



- a. Accessible carparking to be a minimum of 2400mm wide with a shared area to one side of the space 2400mm wide. Circulation space can be shared between adjacent accessible carparks. For a single space, a total width of 4800mm is required.

For parallel parking arrangements, the accessible space is to be a minimum 3200mm wide x 7800mm long. A shared area 1600mm wide is required at the same level of the parking space.

- b. Provide a bollard to the shared circulation space as illustrated in AS2890.6, Figure 2.2.
- c. The maximum allowable crossfall of accessible carparking area to be 1:40. This crossfall applies both parallel and perpendicular to the angle of parking.
- d. For covered carparking, the clear height of the accessible carparking space to be 2500mm as illustrated in AS2890.6, Figure 2.7.
- e. Designated accessible carparking is to be identified using the International Symbol for Access (ISA) between 800 and 1000mm high placed as a pavement marking in the centre of the space between 500-600mm from its entry point. The perimeter of the space is to be identified by an unbroken yellow & slip resistant line 80-100mm wide (except where there is a kerb or wall)
- f. Shared space to be identified using yellow slip-resistant & unbroken stripes 150 to 200mm wide with spaces 200 to 300mm between stripes. Stripes to be at an angle of 45° to the side of the space.

Accessible Entrances

Access requirements for entrances are as follows.

- a. Entrance to comply with AS1428.1(2009), Clause 13 as part of the accessible path of travel.
- b. Doors are to have a minimum clear opening width of 850mm to comply AS1428.1(2009), Clause 13.2 as part of the accessible path of travel.
- c. Door threshold to be level to provide seamless entry as part of the accessible path of travel. Maximum allowable construction tolerance is 3mm for compliance with AS1428.1(2009), 5mm where beveled edges are provided between surfaces – refer to Figure 6.
- d. Door to have hardware within the accessible height range of 900-1100mm above the finished floor level (AS1428.1(2009), Clause 13.5)
- e. For glass doors, provide decals to assist persons with a vision impairment. Decals to be solid and have a minimum 30% luminance contrast to the background colour and be not less than 75mm high located within the



height range of 900-1100mm above the finished floor level. Decals are to be solid. AS1428.1, Clause 6.6.

- f. Where double door sets are provided, one door leaf is to be capable of being held in the closed position to provide door opening widths and circulation to comply with AS 1428.1.
- g. For a best practice approach to access, and to assist people with a vision impairment locate the entrance, consider providing features with a minimum 30% luminance contrast to the background surface such as an entry mat or awning.

Circulation Areas Generally

BCA requires the provision of turning spaces and passing areas to corridors to enable wheelchair circulation throughout a building.

Turning spaces 1540mm wide by 2070mm long are required within 2m of the end of corridors to enable a wheelchair to turn through 90° and passing areas 1800mm wide by 2000mm long are required every 20m along a corridor unless there is a clear line of sight.

Within corridor areas, 1500x1500mm is required to facilitate a 90° turn by a wheelchair. This must be accommodated within accessible areas.

Doorways

Access requirements for doorways within the accessible path of travel are as follows:

- a. Doorways within the accessible path of travel to have a minimum clear opening width of 850mm (AS1428.1(2009), Clause 13.2). We recommend the use of a 920 leaf door as a minimum to achieve adequate clear width.

For double doors, the operable leaf must achieve this clear opening width to facilitate single leaf operation.

- b. All doorways within the accessible path of travel to have complying circulation areas as illustrated in AS1428.1(2009), Figure 31. Circulation areas to have a maximum crossfall of 1:40.
- c. Doors between indoor and outdoor spaces to have a level threshold for seamless transition.
- d. Doorways to have minimum 30% luminance contrast as described in AS1428.1(2009), Clause 13.1.
- e. Doors to have hardware within the accessible height range of 900-1100mm above the finished floor level (AS1428.1(2009), Clause 13.5). Note that within a childcare centre, this is applicable to the unisex accessible sanitary facilities only.



- f. Door handles and related hardware shall be able to be unlocked and opened with one hand per AS1428.1 (2009), Clause 13.5.1. The handles shall enable a person who cannot grip to operate the door without their hand slipping from the handle. We recommend the use of lever handles.
- g. For manual controls to automatic doorways, buttons to be located no closer than 500mm from an internal corner and between 1000mm and 2000mm from the hinged door leaf or surface mounted sliding door in the open position. Height of controls to be 900-1100mm affl.
- h. Doorways to external areas to achieve a level threshold as part of the accessible path of travel. Maximum allowable construction tolerance is 3mm for compliance with AS1428.1(2009), 5mm where beveled edges are provided between surfaces.
- i. Doorways to have operational forces per AS1428.1 (2009), Clause 13.5.2. A maximum allowable force of 20N is required to operate the door.

Hearing Augmentation

For buildings that are required to be accessible, the BCA (Clause D4D8) requires hearing augmentation systems within auditoriums, meeting rooms and the like **where an inbuilt amplification system, other than the one used for emergency warning is installed**. An induction loop to at least 80% of the floor area is required. The hearing augmentation system is to be identified using the International Symbol for Deafness.

Floor Finishes

All floor finishes are to be flush to provide an accessible path of travel throughout the different areas of the building. Maximum allowable construction tolerance is 3mm (5mm for bevelled edges) as part of the accessible path of travel. Refer to AS1428.1(2009), Clause 7.2 for further details.

Carpet

BCA requires that the pile height or pile thickness does not exceed 11 mm and the carpet backing thickness shall not exceed 4 mm.

Controls

Controls such as light switches, GPOs, alarm keypads, card swipes, etc are to be located within the accessible height range of 900-1100mm above the floor level and not within 500mm of an internal corner to comply with AS1428.1(2009), Clause 14.

We recommend that video intercoms be installed at 1200mm affl - this is within the range of common view per AS1428.2 (1992).

Visual Indication to Glazing

Provide decals to all full height glazing that can be mistaken for a doorway to assist persons with a vision impairment. Decals to be solid and have a minimum 30% luminance contrast to the background colour and be not less than 75mm high located within the height range of 900-1100mm above the finished floor level. Decals are to be solid.



Tactile Indicators

For a building that is required to be accessible, tactile ground surface indicators must be provided to warn people who are blind or have a vision impairment that they are approaching a stairway (other than a fire isolated stair); an escalator; a moving walkway; a ramp (other than a fire isolated ramp, step ramp, kerb ramp or swimming pool ramp); and in the absence of a suitable barrier, an overhead obstruction less than 2m above the floor level or an accessway, meeting a vehicular way if there is no kerb or kerb ramp (BCA D4D9).

Tactile indicators to be detectable, durable, non-slip and have a minimum 30% luminance contrast to the background color (45% for discrete tactile indicators and 60% for discrete two-tone tactile indicators).

Signage

Access requirements for signage are as follows. Note that this does not include general wayfinding signage.

- a. Braille and tactile signage formats as outlined within BCA Specification 15 that incorporate the international symbol of access or deafness, as appropriate, in accordance with AS 1428.1 must be provided to identify the following:
 - a sanitary facility, except a sanitary facility associated with a bedroom in a Class 1b building or a sole-occupancy unit in a Class 3 or Class 9c building
 - a space with a hearing augmentation system
 - each door required by E5D5 to be provided with an exit sign and state level
 - an accessible unisex sanitary facility and identify if the facility is suitable for left or right handed use
 - an ambulant accessible sanitary facility 1 and be located on the door of the facility
 - where a pedestrian entrance is not accessible, directional signage incorporating the international symbol of access to direct a person to the location of the nearest accessible pedestrian entrance
 - where a bank of sanitary facilities is not provided with an accessible unisex sanitary facility, directional signage incorporating the international symbol of access must be placed at the location of the sanitary facilities that are not accessible, to direct a person to the location of the nearest accessible unisex sanitary
- b. Braille and tactile components of the sign to be located not less than 1200mm and not higher than 1600mm affl.
- c. Signage to be located at the latch side of the doorway with the leading edge of the sign 50-300mm from the architrave. Where this is not possible, the sign can be located on the door.

Sample signs are as follows. These are examples only – ensure selected signage complies with BCA Specification 15 including provision of Braille locator for multiple lines of text and characters.



Unisex Accessible Sanitary Compartment

Access requirements for the accessible toilet facilities are as follows. For compliance with AS1428.1(2009), the minimum room dimensions of the accessible toilet are to be 1900x2300mm plus additional area for the handbasin. These are **CLEAR** dimensions. Provision for wall linings needs to be considered.

- a. Accessible toilet facilities to be unisex facilities for compliance with the BCA.
- b. Unisex accessible facilities to comply with AS1428.1(2009), Clause 15 including set-out of fittings and fixtures, circulation areas and doorways.
- c. Where more than one unisex accessible toilet is provided within the building, they should be in a mirrored configuration to allow for both left and right-handed use.

WC Pan:

- a. Crucial dimensions for the toilet are 450mm from centreline of pan to side wall, 800mm from front of pan to rear wall and a seat height of 470mm.
- b. A minimum clear dimension of 1400mm is required from the toilet pan to any other fixture (see figure 43).
- c. Grabrails to be provided at the side and rear of the toilet in compliance with AS1428.1 at a height of 800mm.
- d. Toilet seat shall be of the full round type, be securely fixed in position when in use and have fixings that create lateral stability. They should be load rated to 150kg, have a minimum 30% luminance contrast to the background colour (eg pan, wall or floor) and remain in the upright position when fully raised.
- e. Provide a backrest to accessible toilets to comply with AS1428.1, Clause 15.2.4.

Basin:

- f. For the basin, a minimum dimension of 425mm is required from the centreline of the basin to the side wall and height of basin to be between 800 and 830mm.



- g. Taps to have lever handles, sensor plates or similar controls. For lever taps, a minimum 50mm clearance to be provided to adjacent surfaces.

Door:

- h. Doorways to have a minimum clear opening width of 850mm to comply AS1428.1(2009), Clause 13.2 as part of the accessible path of travel. Adequate circulation area at the latch side of the doorway is required to allow independent access to the facility – for details refer to AS1428.1, Figure 31.
- i. Door hardware to be located within the accessible height range of 900-1100mm above the finished floor level. The use of lever handles is encouraged to assist persons with a manual disability such as arthritis.

Controls:

- j. Controls such as light switches within the accessible toilet facilities to be in the accessible height range of 900-1100mm above the finished floor level to comply with AS1428.1(2009), Clause 14. Controls should be located not less than 500mm to a corner.

Ambulant Toilet Cubicles

Requirements for the ambulant toilets are as follows.

- a. Options for the configuration of the ambulant cubicles are illustrated in AS1428.1, Figure 53.
- b. Provide an ambulant cubicle within each bank of male and female toilets in compliance with AS1428.1, Clause 16.
- c. Minimum width of ambulant cubicles to be 900-920mm.
- d. Minimum distance between the front of the WC pan and cubicle door / wall is 900mm,
- e. Seat height to be 460-480mm.
- f. Provide grabrails to ambulant cubicles to comply with AS1428.1, Clause 17 and Figure 53A.
- g. Provide toilet paper holder within the accessible reach zone (within 300mm of the front of the pan at a height less than 700mm).
- h. Doors to have a minimum opening width of 700mm and comply with AS1428.1, Figure 53B.
- i. Provide signage to the ambulant cubicles to comply with AS1428.1, Clause 16.4.



Appendix 2 | Best Practice Options for Consideration



We recommend a best practice approach to accessibility that goes beyond minimum standards and embraces the intent of the DDA. The following measures will promote inclusion and participation for all users.

Accessways

We recommend that the accessible path of travel be a minimum 1200mm wide to comply with AS1428.2. Wider pathways will allow easy access for more people who have a permanent disability, people with a temporary disability, people pushing prams and elderly people using walking frames and the like. This is in keeping with the principles of Universal Design.

For or a wheelchair and a pram to pass 1500mm is required and for two wheelchairs to pass requires 1800mm.

Automatic Entrance Doors

The provision of automatic sliding doorways maximizes access for people with a disability. Further, delivery drivers, people carrying parcels and the elderly also benefit from the provision of automatic doors.

Automatic doors provide safe, convenient access for everyone, regardless of age or ability in keeping with universal design principles. They also offer COVID-19 mitigation measures, reducing the transfer of germs and bacteria.

Luminance Contrast

Luminance contrast assists people with a vision impairment to navigate the built environment. Mandatory items that require luminance contrast are tactile indicators, accessible toilet seats and doorways as outlined in other sections of this report. The following can also be provided as a best practice measure to ensure ease of use:

- Minimum 30% luminance contrast between floors and walls or between walls and skirting boards;
- Minimum 30% luminance contrast between the ground surface and obstructions such as columns, bollards and street furniture;
- To assist people with a vision impairment, locate the building entrance, consider providing features with a minimum 30% luminance contrast to the background surface such as an entry mat or awning.
- Minimum 30% luminance contrast between the floor and the entrance mat (this allows people with vision impairment to locate the entrance);
- Minimum 30% luminance contrast between walls and handrails.

Visual Indication to Glazing (additional measures)

To ensure full height glazing that can be mistaken for a doorway is highlighted, we recommend the provision of a “double decal” as per international precedent. This involves the provision of two (2) decal strips that have a minimum 30% luminance contrast to each other. As such, the background colour does not need to be relied upon.



Kitchenette

While not a statutory requirement, the provision of wheelchair accessible benches promotes inclusion. The following recommendations for the dimensioning, layout and arrangement of kitchens are offered to maximize usability for persons with a disability. Some key principles are as follows:

- The height of benches should be between 700-850mm affl noting that no height will suit all users. We recommend a height of 850mm.
- Clearance in front of the bench of 1540mm is encouraged to facilitate a 180° turn by a wheelchair
- Acceptable hardware for cupboards includes touch latches and D shaped pull handles.
- A shallow sink should be provided. Optimum bowl depth is 150mm with clearances under as per requirements for handbasins.

Furniture and Joinery Hardware

The use of D-type pull handles to furniture and joinery that provide a minimum 35mm clearance between the rear face of the handle and the face of the drawer is generally recommended to promote accessibility and inclusion.

Wayfinding – Signage

Signs and symbols should be provided to inform all users. A signage system which informs all users is encouraged. The use of pictograms and directional cues is recommended as is the use of luminance contrast to ensure the message is clear and legible.

Lighting and Glare

Minimum interior lighting levels should generally consider AS1428.2 (1992) Clause 19. Consistent lighting levels should be provided throughout, without pools of light or dark areas. AS1428.2 (1992) recommends the following minimum illumination levels:

- Entrances 150lx
- Passages and walkways 150lx
- Stairs 150lx
- Toilets and Locker rooms 200lx
- Counter tops 250lx
- General displays 200-300lx

Glare and excessively reflective surfaces should be avoided. This includes glare from windows.

